



LogTag[®] HAXO-16BT

Quick Start Guide

Version A - April 2026

www.logtag.com

Quick Start Guide Contents

Logger and Display Overview	2
Downloading LogTag® Link	3
Configuring Your HAXO-16BT	3
(Optional) Setting up Remote Notifications and Reporting	3
Applying Alarm Settings	3
Starting Your HAXO-16BT	4
During Recording	4
View the Latest Recording in LogTag® Link	5
View Data on the HAXO-16BT Display	5
Stopping the HAXO-16BT	5
Downloading Your Data	6
View Data and Reports on Your Mobile	6

Logger Overview:

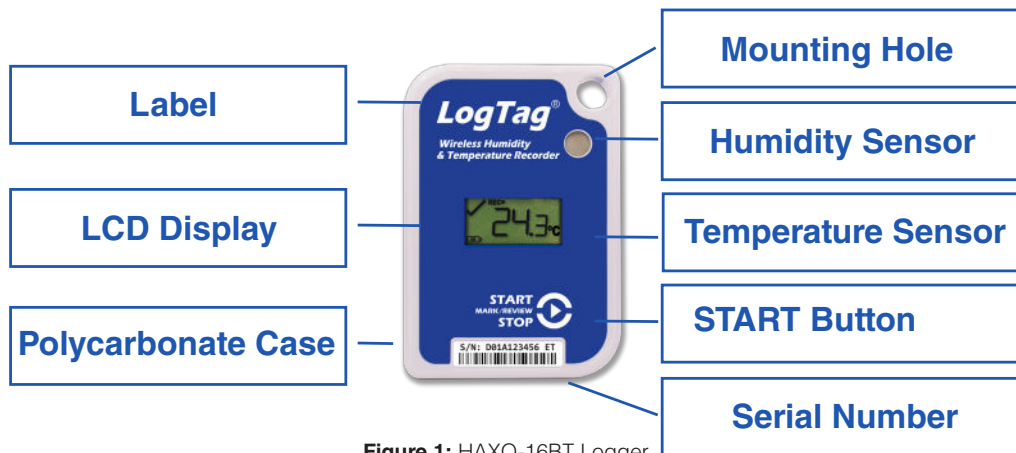


Figure 1: HAXO-16BT Logger

Display Overview:

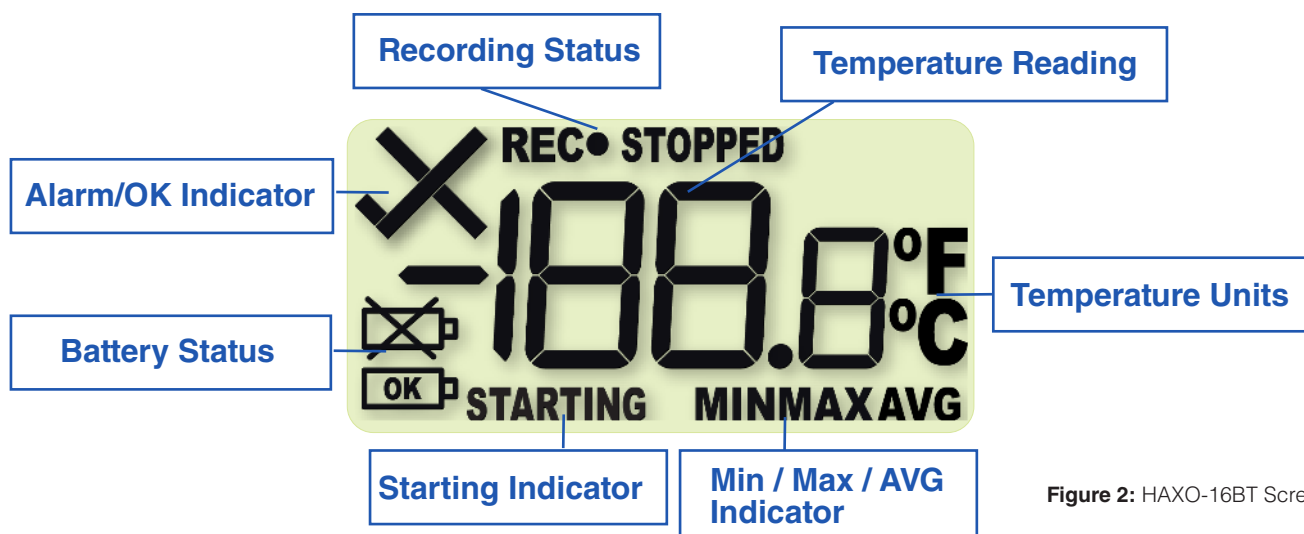


Figure 2: HAXO-16BT Screen

Downloading LogTag® Link

To use the HAXO-16BT, you will need the latest version of the LogTag® Link mobile app. The app is available on both the Apple App Store and Google Play Store.



LogTag® Link

Scan or tap to download



Figure 3: LogTag® Link app icon

Configuring Your HAXO-16BT

(Optional) Setting Up Remote Notifications and Reporting

To set up remote alarms and automatic reporting, a paid LogTag® Online account is required. A free LogTag® Online account can also be used for secure, team access to data and reports online. LogTag® Link will automatically upload data to your account.

If you do not have an account, go to www.logtagonline.com and create one.

For Transportation Monitoring: For Continuous Monitoring:

Create a shipment in LogTag® Online with origin and destination information, then add this logger to your shipment.


To do this, navigate to the Shipments menu by tapping the shipment icon located at the bottom of your screen then click the **Create Shipment** button.

Follow the on screen prompts to create your shipment.

LogTag® Link will now send your data and reports to your LogTag® Online account, no matter who downloads your data. Paid accounts can add and assign team members to receive alerts and reports when data is uploaded. Click the **EDIT NOTIFICATIONS** button when editing your shipment or location settings to select the team member in your account to receive notifications.

Note: To add team members to your account, click your name in the top right corner, select Manage Team, then Team. Add the email addresses of your team members to invite them to your account.

Applying Alarm Settings

Open LogTag® Link and tap the  icon. Enter your LogTag® Online account email and password.

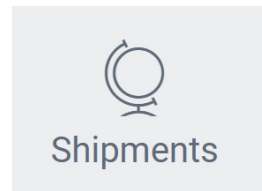


Figure 4: Shipment icon

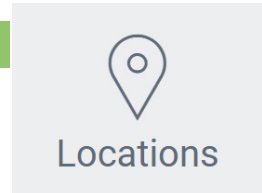


Figure 5: Location icon

To create your alarm settings, you first need a Configuration Profile.


1. Tap the **CREATE** button and name your profile.
2. Adjust your alarm settings as required and tap **SAVE**.

Now you have your alarm settings saved, you need to apply them to your wireless HAXO-16BT logger.

1. Turn Bluetooth on your mobile device that is running LogTag® Link.
2. If your logger's screen is blank, press and hold the **START** button on the logger until APP displays on the screen. If your logger has STOPPED on the screen, you can skip this step.
3. In LogTag® Link, tap CONFIGURE DEVICE and tap LOAD for the alarm settings you want to apply to your logger.
4. Select your logger's serial number in the list. The Loading Configuration screen will display with a progress bar.

Note: Pressing the **START** button on your logger on the Load Configuration page will highlight the logger in green as per figure 7.

Note: If you have multiple loggers that require the same alarm settings, tap  during the Load Configuration screen.

Select all the loggers you want to send the same settings to, then tap  to apply your alarm settings.

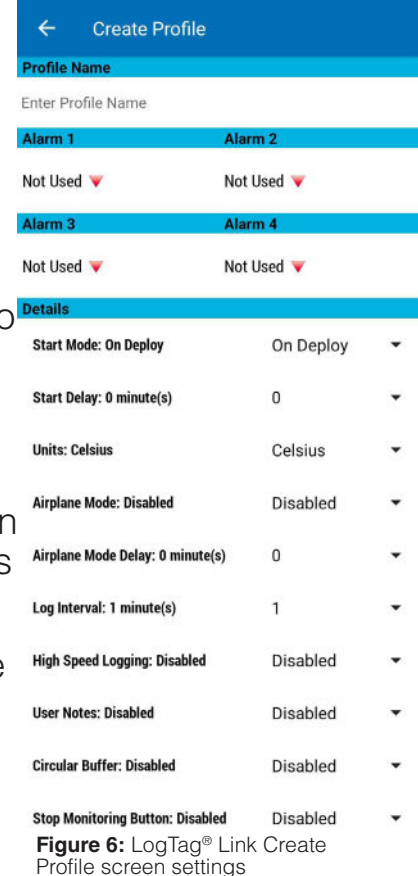


Figure 6: LogTag® Link Create Profile screen settings

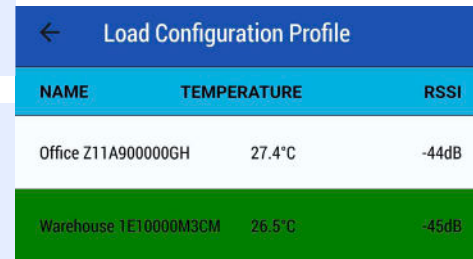


Figure 7: LogTag® Link Load Configuration Profile with logger highlighted green

Starting Your HAXO-16BT

The default Start Mode in LogTag® Link is On Configure, which starts the logger as soon as the alarm settings have been loaded to the logger. You can change this to Push Button, when creating your Configuration Profile.

In this case, your logger will display rdy. If your logger does not display rdy, you need to configure your logger first. See Configuring Your HAXO-16BT.

1. Press and hold the **START** button. You will see STARTING appear. Continue to hold the START button until rdy disappears
2. Release the **START** button when rdy has disappeared. Your logger will then show that it is recording, and the first temperature reading.



Figure 8: Configured logger screen waiting for user to start logging




Figure 9: Configured logger screen, user has pressed the START button




Figure 10: Configured logger screen, user continues to hold the START button



Figure 11: Logger has started recording

During Recording

View the Latest Recording in LogTag® Link:

Review the latest recording wirelessly through LogTag® Link.

1. Open LogTag® Link on your mobile device and tap FIXED ASSET under DATA.
2. Nearby loggers will appear in a list. Any device with an alarm will display with a red background.
3. Currently recording loggers will have an ACTIVE status.
4. To download your data from any of the listed loggers, tap on the logger serial number or name. The most recent temperature and humidity recording will display with the **DOWNLOAD NOW** button.
5. Your data and report will be automatically uploaded to the LogTag® Online account the logger is registered to.



NAME	STATUS	TEMP/HUM
Mine 1E1000M3CM	ACTIVE	25.3°C
Mine @ Z11g ggbb	ACTIVE	25.6°C
FEA00470B6C9	OFF	26.3°C

Figure 12: FIXED ASSET mode with two loggers with alarms triggered.

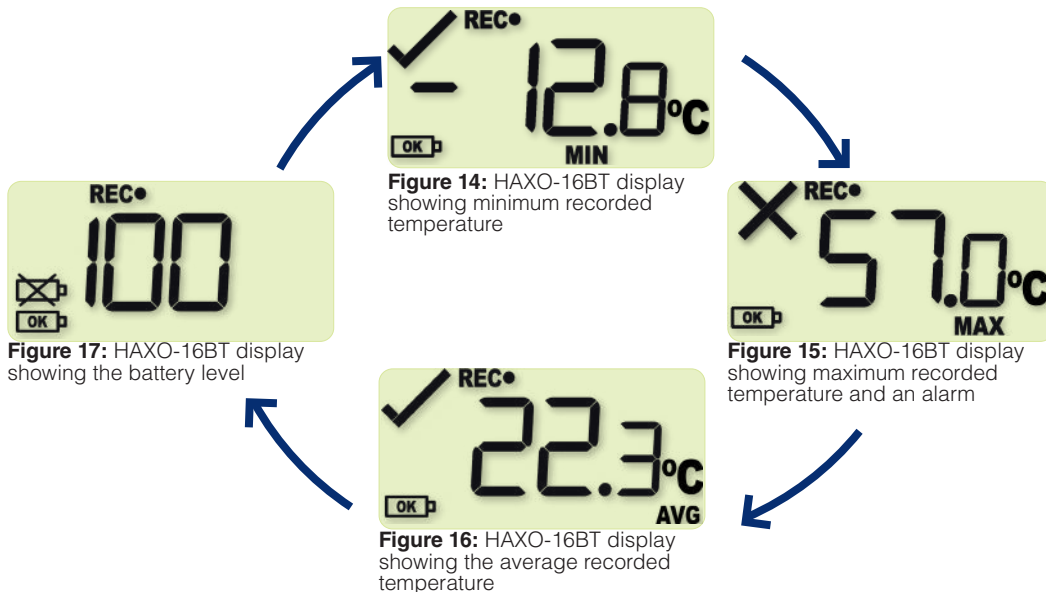


Figure 13: LogTag Link download report from FIXED ASSET screen

View Data on the HAXO-16BT Display:

You can review the key statistics on the HAXO-16BT screen. The latest temperature recording and the alarm status will be displayed on a recording logger by default.

Each press of the **START** button will display the next screen in the sequence.



Stopping the HAXO-16BT

You can configure your logger to stop after data has been downloaded, or when the **START** button is pressed on the logger.

The default setting is to **stop the HAXO-16BT using the LogTag® Link app**. When the data is downloaded, there will be a **Stop Monitoring** button at the bottom of the screen. Tap this to stop the recording.



Figure 18: HAXO-16BT display with STOPPED visible while user is holding the START button

To stop the logger using the **START** button, you must enable the Stop Monitoring Button option in your alarm settings. With this setting, press and hold the **START** button. STOPPED will appear on the logger screen. Continue to hold until REC• disappears. Your logger is no longer recording when the display matches Figure 20.



Figure 19: HAXO-16BT display while the user is pressing the START button, REC• disappeared

Downloading Your Data

1. Open LogTag® Link on your mobile device and turn on Bluetooth.
2. Tap DOWNLOAD in the LogTag® Link app, a list of nearby loggers will appear.
3. Tap on the logger serial number or name that you want to download.
4. You will then see the download screen, followed by a progress bar for the data upload to LogTag® Online. When you see the success message the data and report are now available in your LogTag® Online account.

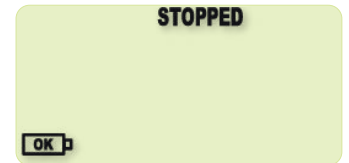





Figure 20: HAXO-16BT display after the START button has been released and has stopped recording

If you do not have a stable internet connection when downloading data, the cloud upload failed icon  will appear in the top right of the report page. To retry the upload, open the History tab when you are online again, then open the saved data to retry the upload.

Note: If you want to download data from more than one logger, tap  during the Download screen.

Select all the loggers you want to download data from, then tap  to start the download.

CONNECTED TO DEVICE

D01A00360200

21 10

Got Status

Collecting Data...



Collecting Excursion Data...



Figure 21: LogTag® Link downloading data from a single logger

Upload Unsuccessful


Data could NOT be uploaded to LogTag online. Please check your connection and try again. Device must be registered with LogTag Online.

OK

Figure 22: LogTag® Link unsuccessful upload warning

Viewing Data and Reports on Your Mobile

When you download your data to your mobile device, the key statistics and chart will be displayed. This can be viewed again later in LogTag® Link by opening the History tab, and selecting your loggers serial number or name.

To share the report or data when you are viewing the reports, tap  at the bottom of your screen. Decide if you want a CSV or PDF report.

Choose which app on your mobile device you want to use to share it.

For more information, see the [Help page](#) or the [HAXO-16BT User Guide](#).

CONFIGURATION PROFILE ALARM SETTINGS

1: 27°C CUMULATIVE for 12 mins 100.0

Not Used

Not Used

Not Used

FLAGGED ALARMS

1: 27°C CUMULATIVE for 12 mins 100.0

TRIGGERED: 2025-12-18T13:16:04+13:00 (1)

Readings:

Press for enhanced graph.

Temperature Humidity Temp Alarm 1

Hum Alarm 1 Inspection

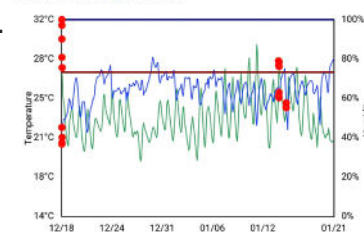


Figure 23: LogTag® Link report screen